

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
5 August 2004 (05.08.2004)

PCT

(10) International Publication Number
WO 2004/066439 A1

(51) International Patent Classification⁷: H01Q 9/04,
19/00, 1/24

(21) International Application Number:
PCT/EP2004/000178

(22) International Filing Date: 14 January 2004 (14.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03001011.0 17 January 2003 (17.01.2003) EP
60/443,365 28 January 2003 (28.01.2003) US

(71) Applicant (for all designated States except US): SONY
ERICSSON MOBILE COMMUNICATION AB
[SE/SE]; S-221 88 Lund (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): ZHINONG, Ying
[SE/SE]; Skyttelinjen 50, S-226 49 Lund (SE).

(74) Agent: DAHNER, Christer; Ström & Gulliksson IP AB,
P.O. Box 7086, S-103 87 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only


Published:

— with international search report

— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

[Continued on next page]

(54) Title: ANTENNA

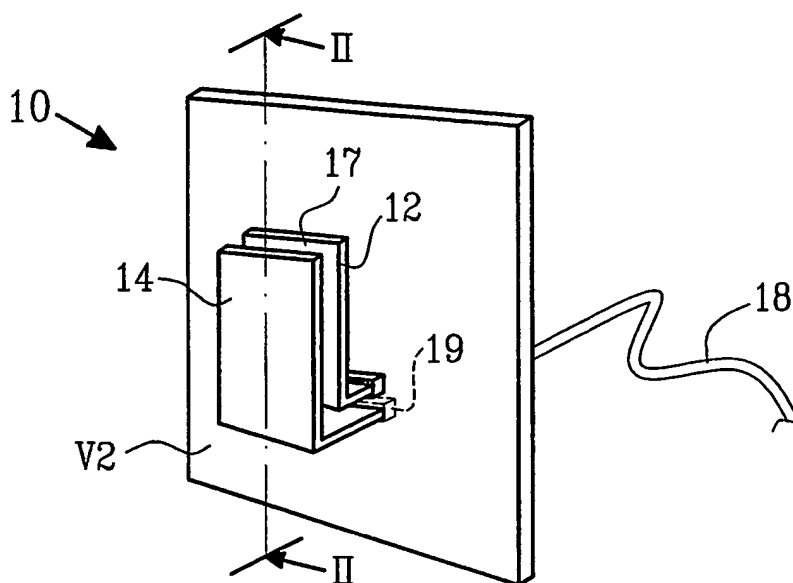

(57) Abstract: Antenna arrangement for a portable communication device, and portable communication device comprising such an antenna arrangement (10) built-in, wherein said antenna arrangement (10) comprises antenna patches (12, 14) separated by a gap (17) comprise capacitance feeding being frequency dependent.



WO 2004/066439 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

10/542310

ANTENNA JC14 Rec'd PCT/PTO 15 JUL 2009

TECHNICAL FIELD OF THE INVENTION

The present invention relates to the field of antennas and more particularly to an antenna
5 arrangement for a portable communication device as well as a portable communication
device including such an antenna arrangement built-in.

DESCRIPTION OF RELATED ART

There is a trend within the field of portable communication devices, and especially within
10 the field of cellular phones to have the antenna built-in, in the device itself. Probably,
future portable communication devices will be small in size and light in weight. Typically, in
such devices, built-in antennas will even be required. Today, existing portable
communication devices such as cellular phones provided with built-in antennas normally
have so-called "microstrip" antennas or so-called "planar inverted-F" antennas (PIFAs).

15 Microstrip antennas have low profile, are small in size and light in weight, but do not
always provide use of more than one band, i. e. do not offer so-called "multi-band"
capability. In the case of a micro-strip antenna multi-band capability could be provided as
multiple strip line parts which resonant at different frequencies, thus, as a result an
20 antenna providing multi-band possibility. An example of this technique, could be found in
US-A-6 166 694. In this document a printed twin-spiral dual band antenna is disclosed.

PIFAs have already been used in mobile phones and is one of the most promising designs.
See for instance K. Qassim, "Inverted F-antenna for portable handsets", IEEE Colloquium on
25 Microwave Filters and Antennas for Personal Communication Systems, pp. 3/1-3/6, Feb.
1994, London, UK.

Also meandering inverted F-antennas have been described, see for instance WO-A1-96/27
219, whereby antenna size can be reduced compared to conventional PIFAs.

30 However, as the portable communication devices become smaller, at the same time
multiple antennas for instance for cellular, wireless local area networks (LANs), GPS
applications etc will be required, whereby conventional antennas will still not be able to
provide sufficient multi-band capability, and in particular not sufficient bandwidth and/or
35 will be too large to fit small chassis of future portable communication devices.

There is therefore a need for an antenna arrangement for a portable communication
device, which provides sufficient band width, in particular such an antenna arrangement
which provides broad-band capability despite small volume.

SUMMARY OF THE INVENTION

The present invention is directed towards solving the problem of providing an antenna arrangement, in particular a built-in antenna arrangement, that provides broad-band
5 capability combined with light weight and/or small size.

An object of the present invention is also to provide an antenna arrangement solving the problem(s) stated above. Another object of the invention is to provide a portable communication device comprising such an antenna arrangement.

10

According to a first aspect of the present invention, this is achieved by an antenna arrangement comprising:

a first antenna patch to be connected to a first feeding potential, and
a second antenna patch to be connected to a second feeding potential, said antenna

15 patches being adapted to comprise capacitance feeding being frequency dependent.

In this way a variable capacitance is provided which is frequency dependent. This provides much more bandwidth, typically twice as much when compared to a conventional PIFA having the same antenna volume.

20

A second aspect of the present invention is directed towards an antenna arrangement including the features of the first aspect, wherein the patches are separated by a gap comprising dielectric or forming material. Since the antenna arrangement looks like dual L:s, in the following, the antenna arrangement, according to various embodiments of the
25 present invention, will also be referred to as a "PDLA" (Planar Dual L Antenna). Preferably, the dielectric material has low dielectric constant.

A third aspect of the present invention is directed towards an antenna arrangement including the features of the first or second aspect, wherein the length of the gap is

30 between 0,1 to 0,3 % of a wavelength coming to/from a source.

A fourth aspect of the present invention is directed towards an antenna arrangement including the features of the first, second or third aspect, wherein the second feeding potential is ground.

35

A fifth aspect of the present invention is directed towards an antenna arrangement including the features of the first, second, third or fourth aspect, wherein the patches have a length approximately equal to a quarter of a wavelength at the operating frequency band.

A sixth aspect of the present invention is directed towards an antenna arrangement including the features of the first, second, third, fourth, or fifth aspect, wherein the connection between the first feeding potential, provided by a radio circuit (source) and first patch is screened.

5

A seven aspect of the present invention is directed towards an antenna arrangement including the features of the first, second, third, fourth, fifth or sixth aspect, wherein the radio circuit is connected to the first patch at an edge thereof.

- 10 Another object of the present invention is directed towards providing a portable communication device including an antenna arrangement.

According to an eight aspect of the present invention, this object is achieved by a portable communication device, said device comprising a chassis having a microphone, a speaker
15 opening, and a keypad, wherein the device further comprises an antenna arrangement, said antenna arrangement comprising:

a first antenna patch to be connected to a first feeding potential, and
a second antenna patch to be connected to a second feeding potential, said antenna patches being adapted to comprise capacitance feeding being frequency dependent.

20

The invention has the following advantages: The antenna arrangement has broad-band capability, whereby much wider bandwidth can be achieved by using the same volume as prior art antennas. It is cheap and easy to implement in a portable communication device. In addition, the PCB space requirement for the built-in antenna arrangement is minimised
25 due to its small size.

It should be emphasized that the term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components, but does not preclude the presence or addition of one or more other features,
30 integers, steps, components or groups thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described in more detail in relation to the enclosed drawings, in which:

35

Fig. 1 schematically shows a perspective view of antenna arrangement according to a first embodiment of the invention.

Fig. 2 shows a cross-sectional view of the antenna element illustrated in Fig. 1, said view taken along a line A-A in Fig. 1.

Fig. 3 shows an equivalent circuit of the antenna arrangement in Figs. 1-2.

5

Fig. 4 shows a simulation result in the form of a frequency curve obtained by using a simulation tool.

Fig. 5 illustrates an embodiment of a portable communication device in which the antenna arrangement according to the present invention may be implemented.

Fig. 6 illustrates a return loss and Smith chart of the antenna arrangement according to one embodiment of the invention.

15 DETAILED DESCRIPTION OF EMBODIMENTS

As required, detailed embodiments of the present invention are disclosed herein; however, it is to be understood that the disclosed embodiments are merely examples of the invention that may be further embodied in various and alternative forms other than described below. The drawings are not necessarily to scale, and some elements may be exaggerated or minimized to show details of particular components or features. Therefore, specific structural and functional details disclosed herein are not to be interpreted as limiting in any sense, but merely as a basis for the claims and as a representative basis for enabling one skilled in the art to variously put the present invention into practice.

Fig. 1 schematically shows a perspective view of the antenna arrangement according to a first embodiment of the invention. The antenna arrangement 10 includes a first antenna patch 12 herein in the form of a conducting layer, to be connected to a first feeding potential V_1 , and a second antenna patch 14, herein in the form of a conducting layer, to be connected to a second feeding potential V_2 potential, in this particular embodiment ground potential. The second feeding potential V_2 is typically ground, but can be any suitable potential including negative potential.

The antenna patches can be made of any suitable material, such as metal, polymer material or the like.

35

Now is referred to Fig. 2, which is a cross-sectional view of Fig. 1. The first and second patches 12, 14 are separated by a gap 17 comprising dielectric or forming material, thereby providing a variable capacitance being frequency dependent, depending on an operating frequency of the antenna arrangement. Preferably, the patches 12, 14 are in the

form of L-shaped conducting layers stacked onto each other in a capacitor like fashion. The short between the second patch 14 and ground can be formed, for instance by threading conducting fabric through a slot 19. The arrangement of the antenna arrangement 10 in a portable communication device will be further described below; however, design parameters such as sufficient distance from a chassis of the device (not shown) and other parameters obvious for a person skilled in the art to design, will not be described.

Herein, the term "gap" is meant a space where no conducting elements are placed. Different dielectric or forming (electret) material can therefore be placed here. Materials to be employed as dielectric materials in the gap should preferably have low dielectric constants (such materials are dependent on the frequency at "high" frequencies, but normally not at "low" frequencies). Normally, in application within the field of the present invention, frequencies are high. Particular examples of materials are for instance: polytetrafluorethylene (PTFE) or low-density polyethylene (LDPE).

An insulated conductor 18, connecting to a radio circuit or other source (not shown) is connected to the first patch 12. The conductor 18 can for instance be a conventional coaxial cable, whereby for instance a centre conductor of the same is connected to the first patch 12, typically at an edge of the first patch 12, for instance by soldering or other suitable conventional fastening method.

The patches can have different area. For instance, by controlling the length (or the width) of the patches, the antenna arrangement can also be capable of being tuned to different frequencies, for instance to be able also to operate in multiple frequency bands. For example, a first band may be a GSM band and the second band a DCS band. Of course, other combinations of frequency bands may be implemented without departing from the invention. Examples are: GSM+PCS, GSM+WCDMA etc.

In a preferred embodiment the patches has a length approximately equal to, or approaching a quarter wavelength at the operating frequency band (e.g. around 450 MHz for a cellular phone). It can also be equal to the full wavelength.

The physical form of the patches can be any suitable, for instance planar layers, curved surfaces etc provided that they can be arranged in a capacitor-like fashion.

Typically, an overall thickness of the antenna arrangement according to the invention is below 15 mm. Tuning of the antenna arrangement can be accomplished for instance by a matching bridge (not shown).

Now is referred to Fig. 3, which shows an equivalent circuit of the antenna arrangement. The antenna arrangement can be described by means of an equivalent circuit 100, wherein an inductance L and a capacitor C connected in parallel are connected in series to a variable capacitor Cv having a variable capacitance (illustrated by an inclined arrow),
5 which is frequency dependent due to the gap between the patches. Conventional PIFAs has fixed L and C, i. e. no variable capacitance Cv, whereby the bandwidth is limited when the antenna volume is small.

Typically, the gap is dimensioned such that its length and impedance allow the antenna
10 arrangement to be fed with an intended radio frequency bandwidth to stay within limits for broad-band performance and the antenna arrangement to work well. Radiation characteristics, drive point impedance and simple construction are parameters that typically have to be considered. However, since they are well-known for a person skilled in the art to design, they will not be further discussed herein. Preferably, the gap is about 0,1
15 to 0,3 percent of the wavelength.

As described above, the resonant frequencies f0 and bandwidth of the built-in antenna arrangement according to the present invention are dependent upon thickness of the dielectric material, but also the type of dielectric material (i. e. the dielectric constant) will
20 influence. The resonant frequencies could be described by a well-known general formula (I):

$$f_0 = 1/2\pi LC \quad (I)$$

25 By designing the patches smartly, broad band characteristics could be further improved. For instance a loading resistor could be provided to further enhance bandwidth.

Because of the size of the antenna arrangement of the present invention, the antenna is easily driven in many frequency bands, for instance GSM/900/1800, PCS 1900, UMTS
30 bands and even GPS bands. The different frequency bands are easily provided by the radio circuits including components such as tuning filter or a tuning network in order to comply with the different frequency bands.

In order to illustrate the effectiveness of the present invention, Fig. 4 set forth results of
35 simulations for exemplary antenna arrangements. Fig. 4 shows that bandwidth increases by 30 % compared to a conventional PIFA. The PDLA introduces a Cv component as illustrated in Fig. 3 that allows the PDLA to have near 50 ohms in a broad-band. This is further shown in Fig. 6, in which a circle around a centre of 50 ohms is shown. In Fig. 6 it

is shown the impedance of the antenna arrangement for a large frequency range. Since Fig. 6 is a conventional Smith chart it will not be further described herein.

The present invention has many advantages. The frequency dependent capacitance

- 5 feeding, realised by two patches coupled to each other, provides two resonances adjacent to each other. In this way the bandwidth is doubled compared to a conventional PIFA. The antenna arrangement provides better wideband performance because of the capacitive feeding compared to conventional PIFAs.
- 10 In Fig. 5, a portable communication device according to the invention will now be described in relation to a mobile phone, which is a preferred embodiment of the invention. It can be other types of electronic communication devices though, like a cordless phone, a communication module, a PDA or any other type of portable device communicating with radio waves. Most likely, there will be a number of varying portable communication devices
- 15 in the future when the 3rd generation cellular systems are implemented. Therefore, preferably, the portable communication device according to the present invention, provides adequate gain and bandwidth in all existing present and future frequency bands, typically within a range of 300-3000 MHz.
- 20 The portable communication device, herein a mobile phone, illustrated in Fig. 5 comprises a built-in antenna arrangement according to the present invention. The mobile phone 200 includes a chassis 210 having a microphone opening 220 and speaker opening 230 located approximately next to the position of the mouth and ear, respectively of a user. A keypad 240 allows the user to interact with the communication device, e. g. by inputting a
- 25 telephone number to be dialled. The mobile phone 200 also includes a built-in antenna 250, the details of which have been described above.

The foregoing has described the principles, preferred embodiments and modes of operation of the present invention. However, the invention should not be construed as being limited

30 to the particular embodiments discussed above. Thus, the above-described embodiments should be regarded as illustrative rather than restrictive, and it should be appreciated that variations may be made in those embodiments by workers skilled in the art without departing from the scope of the present invention as defined by the following claims.

CLAIMS

1. Antenna arrangement to be provided in a portable communication device, wherein the antenna arrangement (10) comprises:
5 a first antenna patch (12) to be connected to a first feeding potential (V_1), and a second antenna patch (14) to be connected to a second feeding potential (V_2), preferably a ground point, said antenna patches (12, 14) being adapted to comprise capacitance feeding being frequency dependent.
- 10 2. Antenna arrangement according to claim 1, wherein said first and second antenna patches (12, 14) are separated by a gap (17) comprising dielectric or forming material.
- 15 3. Antenna arrangement according to claim 1 or 2, wherein the dielectric material has low dielectric constant.
- 20 4. Antenna arrangement according to any one of the claims 1-3, wherein the length of the gap (17) is between 0,1 to 0,3 % of a wavelength coming from/to a source (S).
- 25 5. Antenna arrangement according to any one of the claims 1 to 4, wherein the second feeding (V_2) potential is ground potential.
6. Antenna arrangement according to any one of the claims 1-5, wherein the antenna patches (12, 14) have a length approaching a quarter wavelength at the operating frequency band.
- 30 7. Antenna arrangement according to any one of the preceding claims, wherein the connection (18) between the first feeding potential (V_1), provided by radio circuit (a source) (S) and first patch (12) is screened.
8. Antenna arrangement according to any one of the preceding claims, wherein the radio circuit (S) is connected to the first antenna patch (12) at an edge thereof.
- 35 9. Portable communication device, said device (200) comprising a chassis (210) having a microphone (220), a speaker opening 230, and a keypad (240), wherein the device (200) further comprises an antenna arrangement (10), said antenna arrangement (10) comprising:

a first antenna patch (12) to be connected to a first feeding potential (V_1), and a second antenna patch (14) to be connected to a second feeding potential (V_2), said antenna patches (12, 14) being adapted to comprise capacitance feeding being frequency dependent.

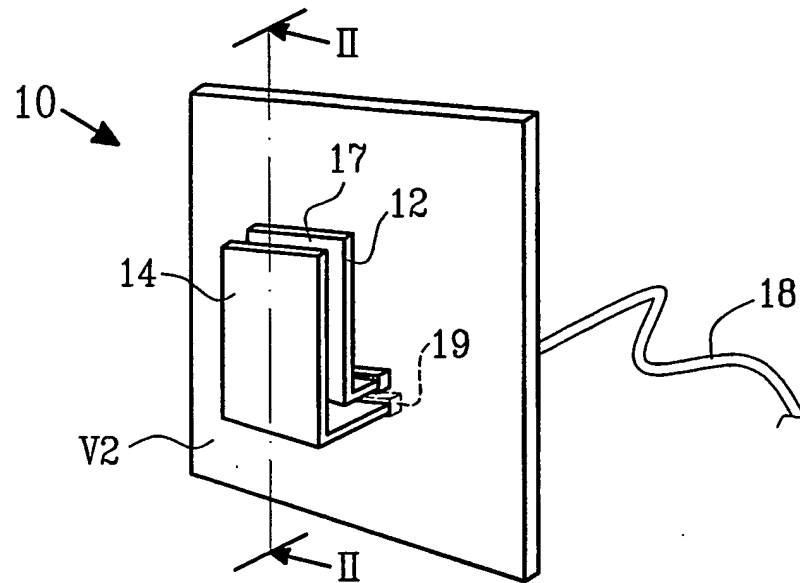


FIG. 1

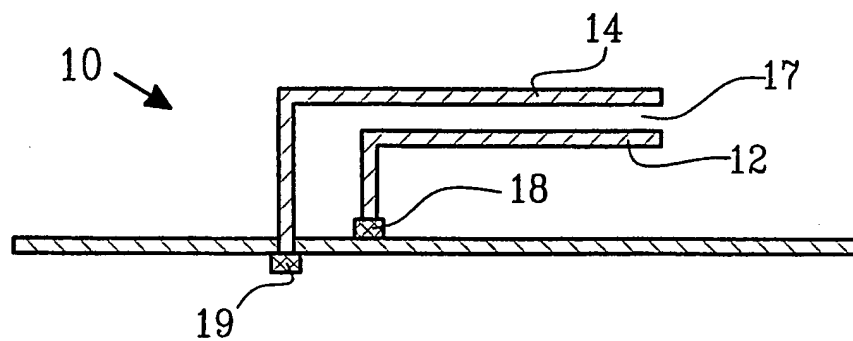


FIG. 2

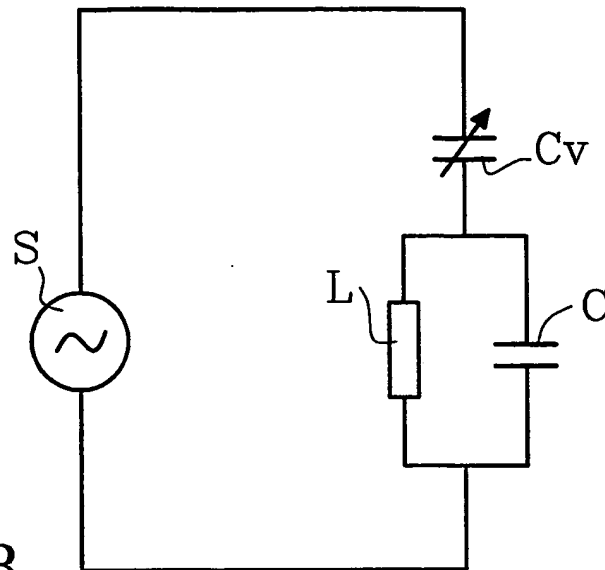


FIG.3

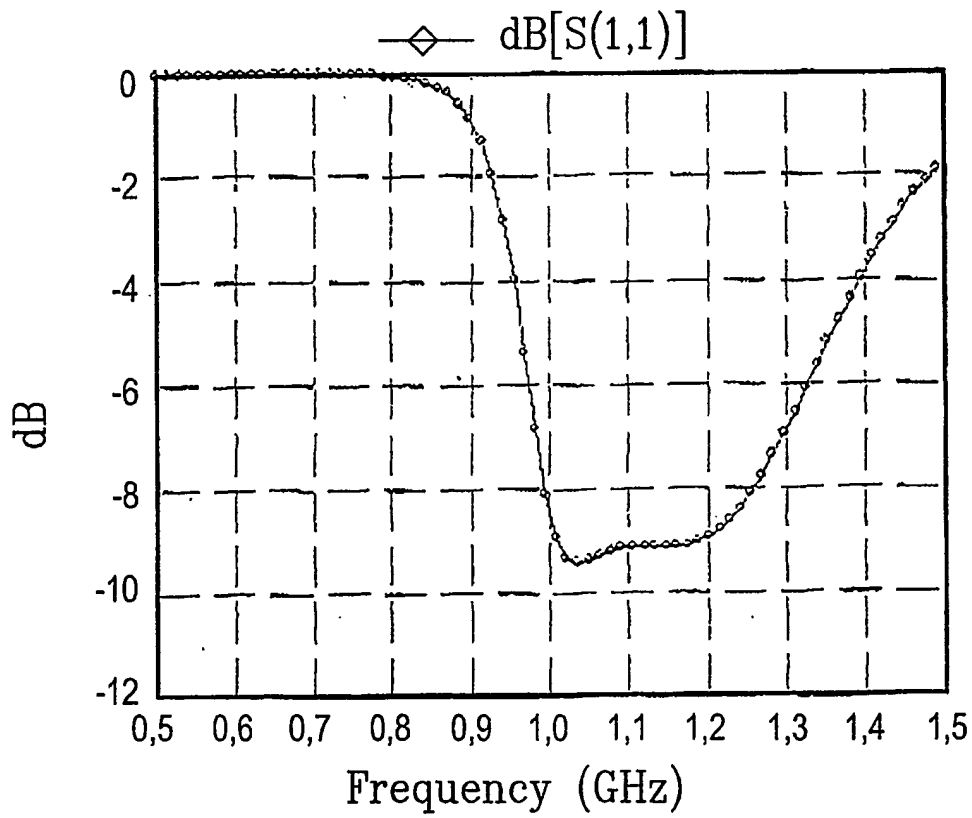


FIG.4

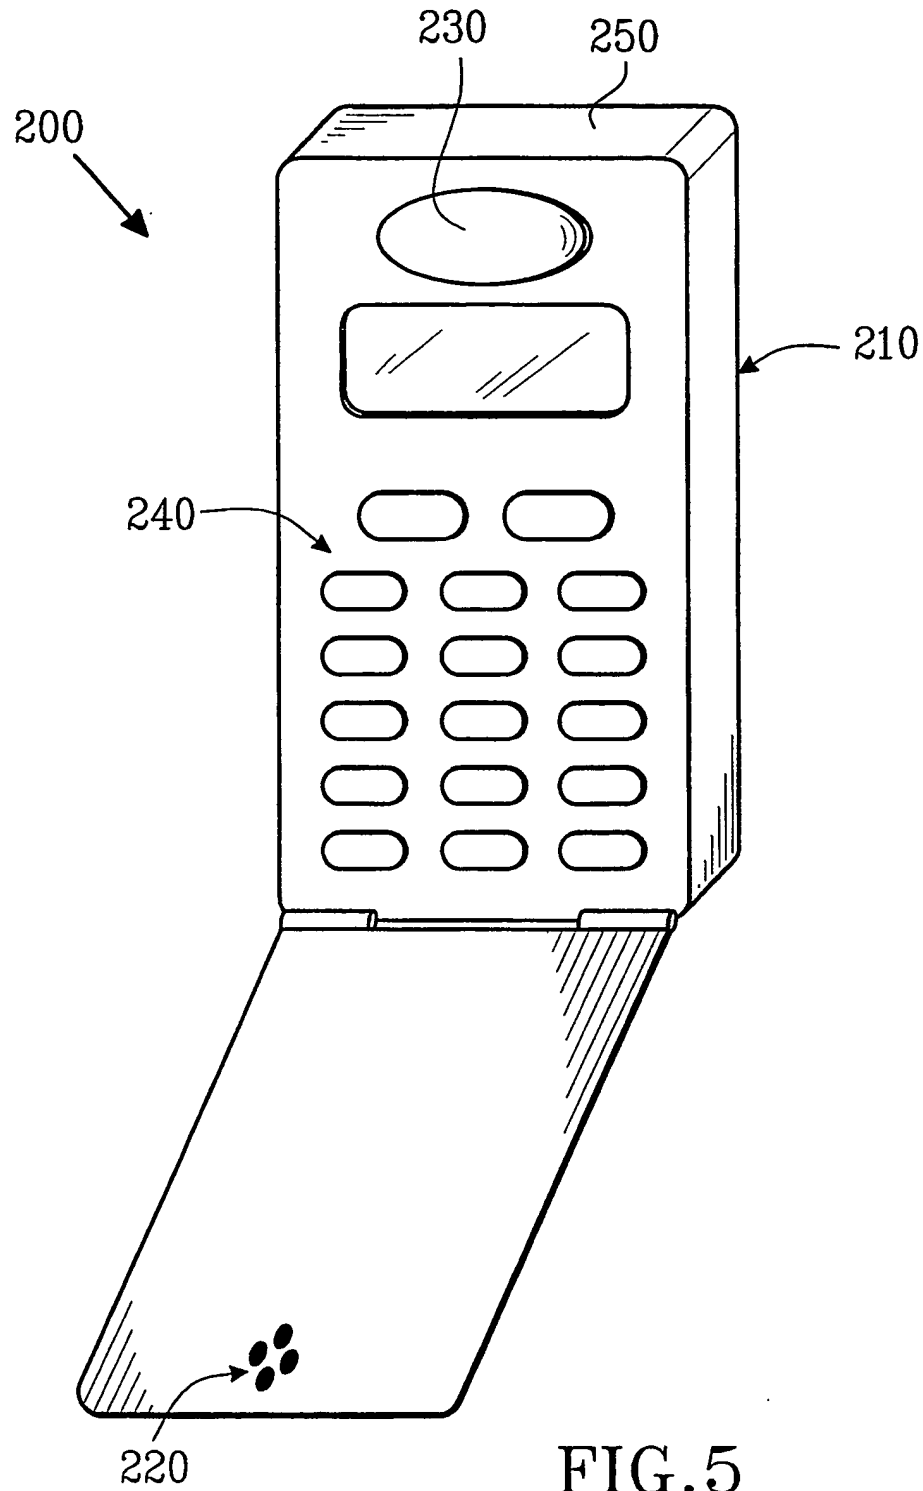


FIG. 5

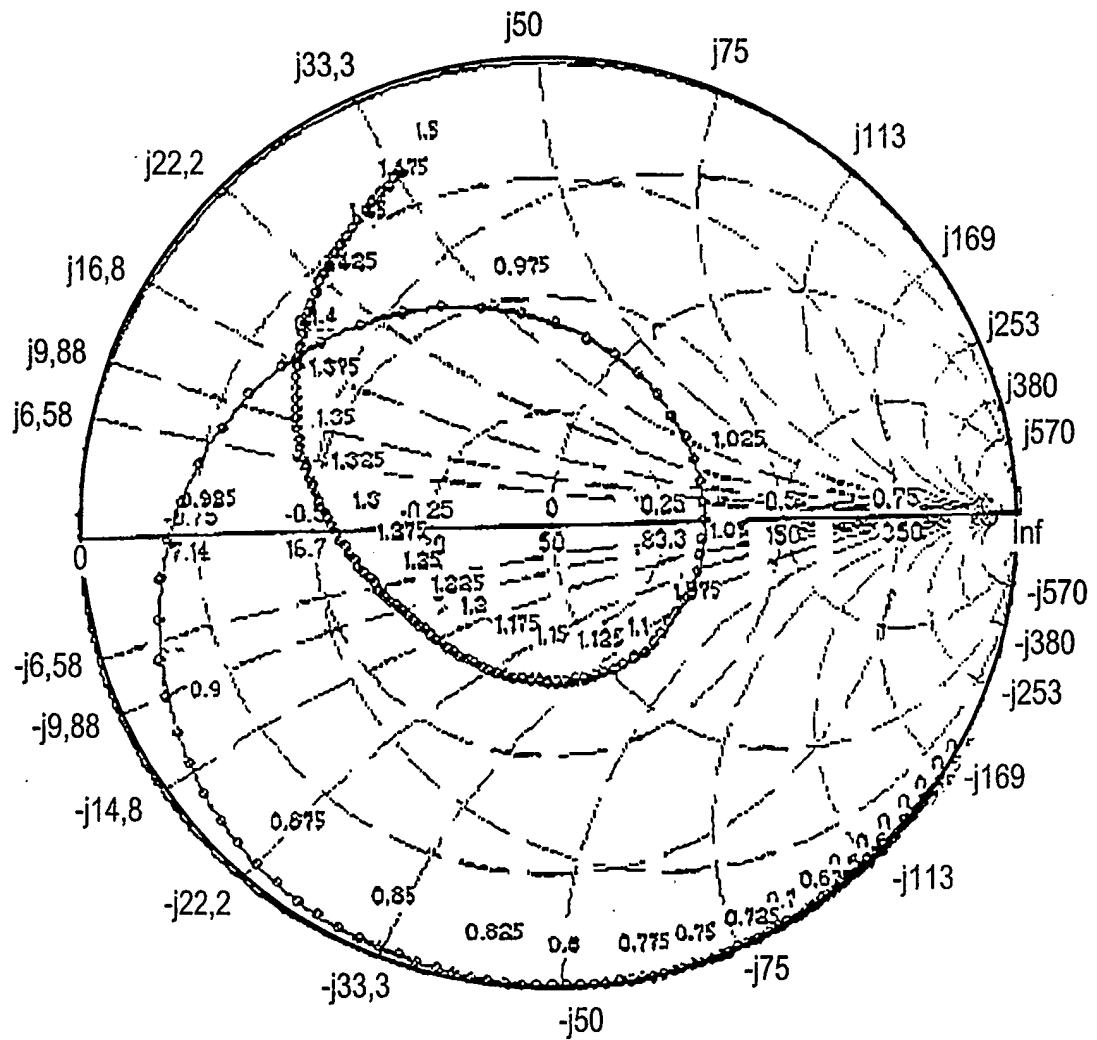


FIG.6

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H01Q9/04 H01Q19/00 H01Q1/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 764 190 A (MURCH ROSS DAVID ET AL) 9 June 1998 (1998-06-09) column 2, line 65 - column 4, line 5; figures 2,3,11	1-9
X	EP 0 332 139 A (TOYODA CHUO KENKYUSHO KK) 13 September 1989 (1989-09-13) column 7, line 34 - column 8, line 4; figures 7,10	1,8
A	EP 0 942 488 A (MURATA MANUFACTURING CO) 15 September 1999 (1999-09-15) paragraphs '0016! - '0021!; figures 1,2	1
A	EP 0 871 238 A (NOKIA MOBILE PHONES LTD) 14 October 1998 (1998-10-14) column 3, line 53 - column 5, line 36; figures 3,4	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

10 May 2004

Date of mailing of the international search report

25/05/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Van Dooren, G

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5764190	A	09-06-1998	NONE	
EP 0332139	A	13-09-1989	JP 1231404 A	14-09-1989
			JP 1942242 C	23-06-1995
			JP 6059009 B	03-08-1994
			CA 1313408 C	02-02-1993
			DE 68909072 D1	21-10-1993
			DE 68909072 T2	24-03-1994
			EP 0332139 A2	13-09-1989
			US 4907006 A	06-03-1990
EP 0942488	A	15-09-1999	JP 3252786 B2	04-02-2002
			JP 11312923 A	09-11-1999
			EP 0942488 A2	15-09-1999
			US 6147650 A	14-11-2000
EP 0871238	A	14-10-1998	FI 971235 A	26-09-1998
			EP 0871238 A2	14-10-1998
			US 6008764 A	28-12-1999